

### Tron Wall fixture



#### Description

Linear lighting



For uplighting.. Suitable for installation in marine environments. Includes 2 cable outlets to facilitate chain mounting. Adjustable light source. Structure material: Extruded aluminium. Structure finish: Anodized. Diffuser material: Glass. Diffuser finish: Transparent. UV protection. Warranty: 5 Years. Ta max: 50°C.

#### Finish

Anodized  
Transparent

#### Material

Extruded aluminium  
Glass



#### TECHNICAL CHARACTERISTICS

##### Light source

Light source: LED CREE  
Output (W): 29.2W  
Color temperature: Led RGB  
CRI: 80  
Real Lumen: 1197  
Qty Leds: 18  
Lm/Real W: 41  
Life Time: 50.000h L90B10  
Bin / Grup: RGB  
MacAdam steps: 3  
UGR: 12.5

##### GEAR

This item requires gear. It is not included.  
Voltage / Frequency: 24 VDC



##### Luminaire

Double cable exit: Yes  
Drainage: No  
Seaside: Yes  
Uv Protection: Yes  
Warranty: 5 Years  
Ta max: 50°C

##### Logistics



Energy Efficiency: LED A++  
EAN Code: 8435381497699  
Net Weight (Kg): 1.200  
Weight in Kg (packaged): 1.647  
Packing: - x - x -  
Masterbox: 12

The photograph may not match the reference exactly. Please read the product description to identify the finish.

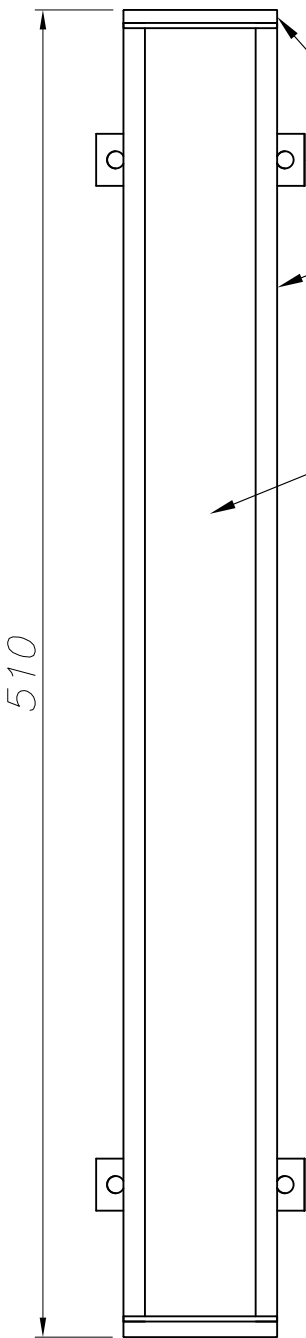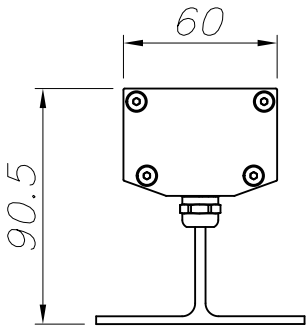

ALUMINIO ANODIZADO  
ANODIZED ALUMINIUM

CRISTAL TRANSPARENTE  
TRANSPARENT GLASS

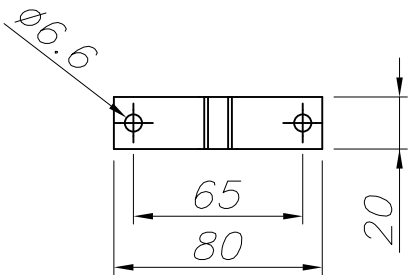

PLANTILLA DE INSTALACION  
INSTALLATION TEMPLATE

# LEDS C4

GUIA INSTALACIÓN SERIE TRON  
INSTALLATION GUIDE TRON SERIES  
INSTALLATIONSANLEITUNG SERIE TRON  
GUIDE D'INSTALLATION SÉRIE TRON  
GUIDA DI INSTALLAZIONE SERIE TRON

05-E001-54-CL / 05-E003-54-CL - WARM WHITE








05-E001-54-CM / 05-E003-54-CM - NEUTRAL WHITE

05-E000-54-37 / 05-E002-54-37 - RGB

LEDS-C4 S.A.  
CIF A-59410910

Afores, s/n  
25750 Torà · Lleida · Spain  
T +34 973 46 81 00  
F +34 973 46 81 06  
e-mail: leds-c4@leds-c4.com

[WWW.LEDS-C4.COM](http://WWW.LEDS-C4.COM)

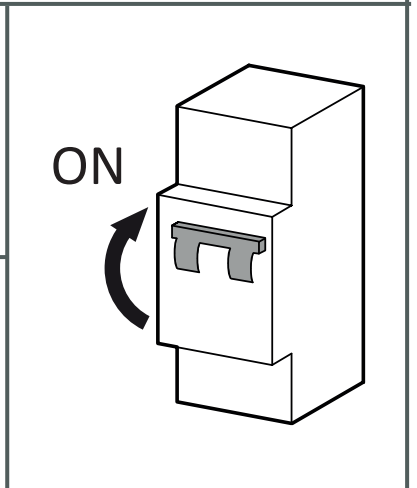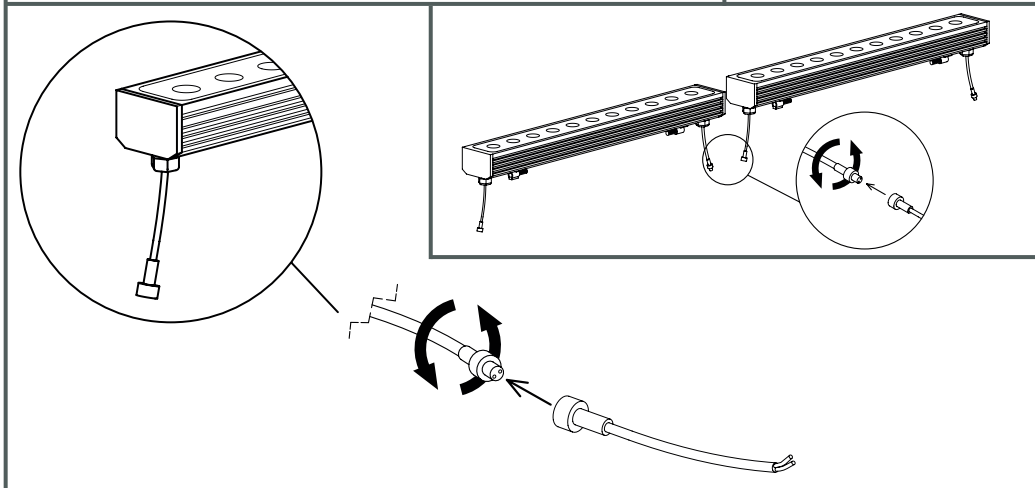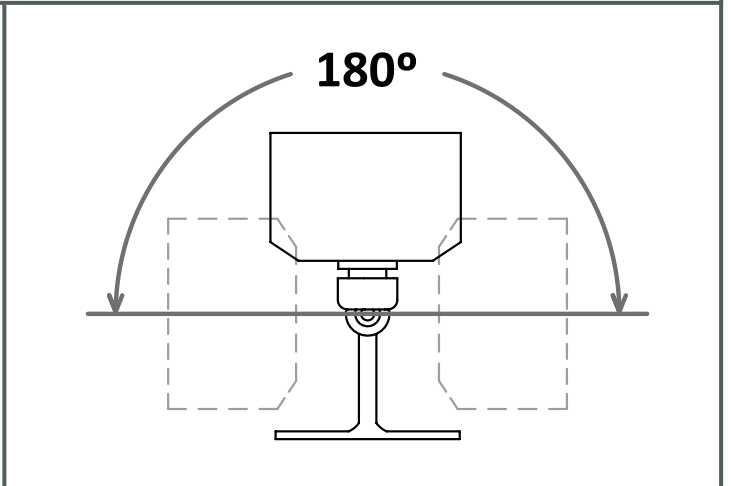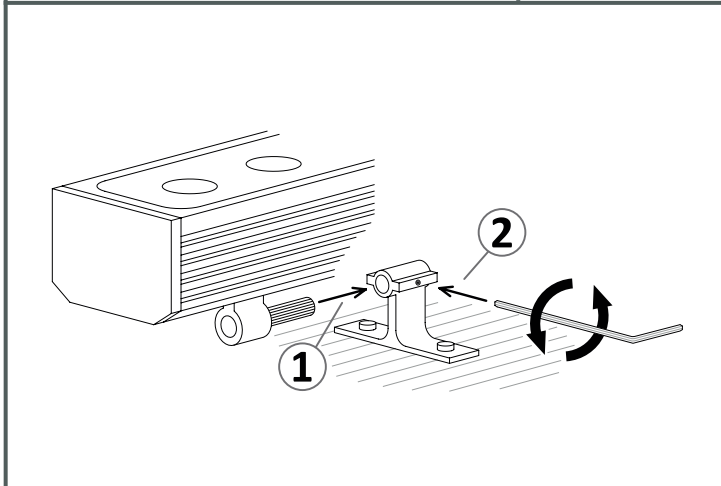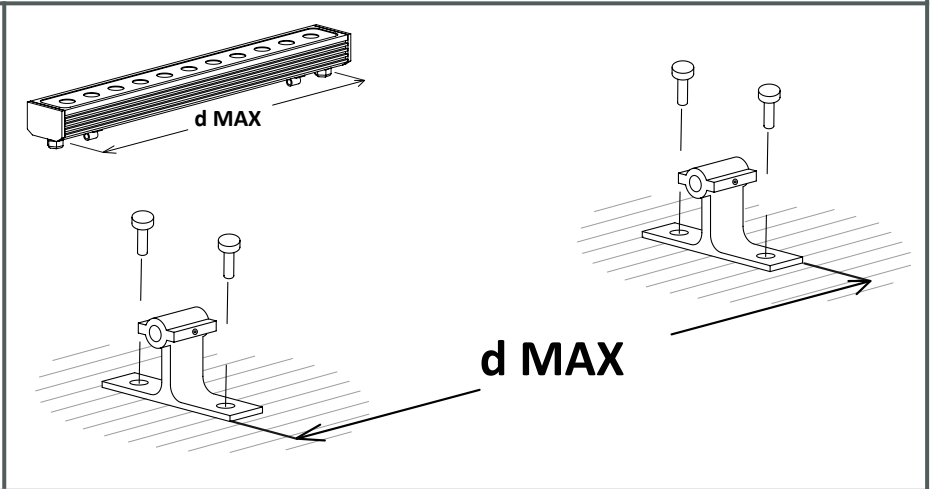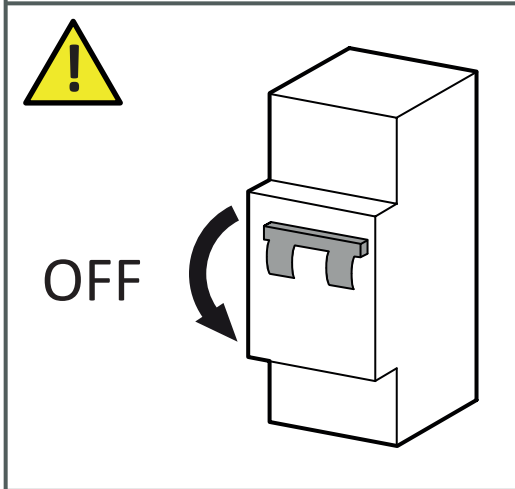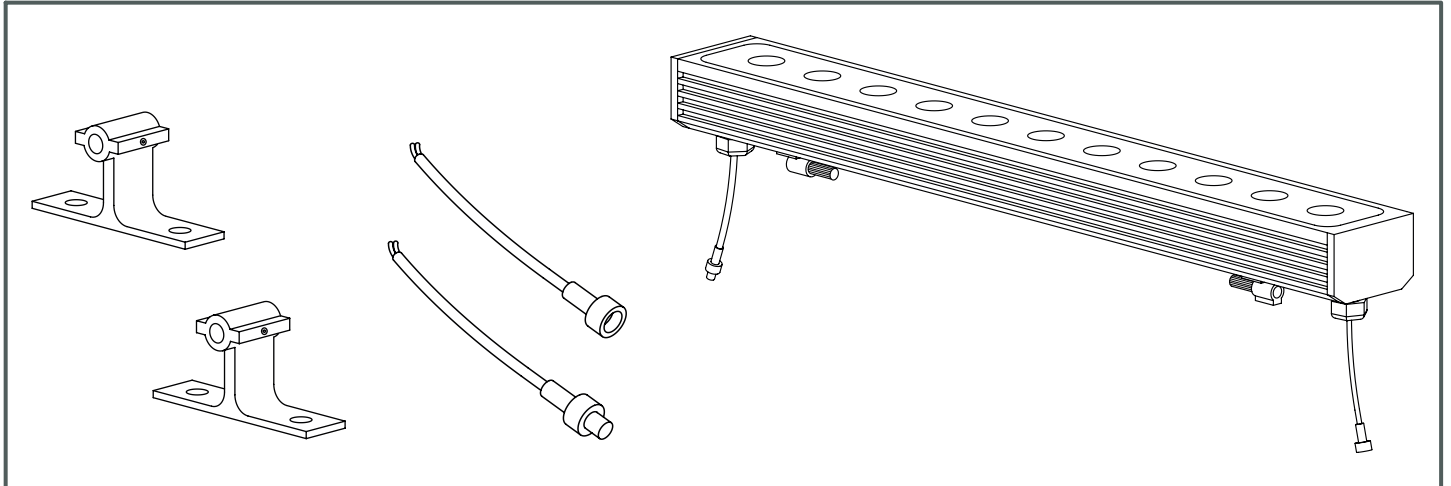

- PS**  
24VDC
- Power Supply  
 71-6339-00-00 - 35W  
 71-6340-00-00 - 60W  
 71-6342-00-00 - 75W  
 71-6341-00-00 - 100W  
 71-6343-00-00 - 150W  
 71-6344-00-00 - 150W  
 71-6345-00-00 - 240W  
 71-6346-00-00 - 320W


- PS**  
DALI
- Power Supply DALI  
 71-7708-00-00 - 150W


- C**  
DALI
- Controller DALI  
 71-3473-00-00  
 24V/120W

- C**  
DMX
- Controller DMX  
 71-3493-00-00  
 RGB/24V/144W  
 RGBW/24V/192W

- C**  
1-10V
- Controller 1-10V  
 71-0727-00-00  
 24V/2x156W


-  Tactile screens  
 71-7666 RGB DMX  
 71-7664 RGB PWM  
 71-7671 DALI 1 zone  
 71-7665 DALI 4 zones

-  **C**  
WHITE
- Remote control White  
 71-7670 Remote control  
 71-7668 Reciever unit  
 24V/192W  
 12V/96W


-  **C**  
RGB
- Remote control RGB  
 71-7667 Remote control  
 71-7669 Reciever unit  
 24V/360W  
 12V/180W

## WHITE


### Not dimmable

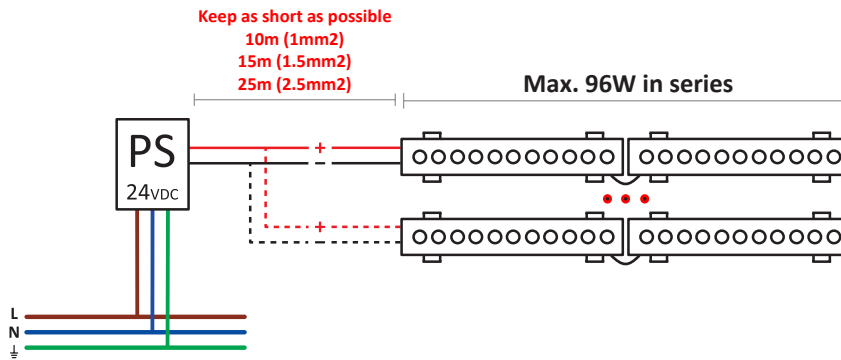



### Remote control

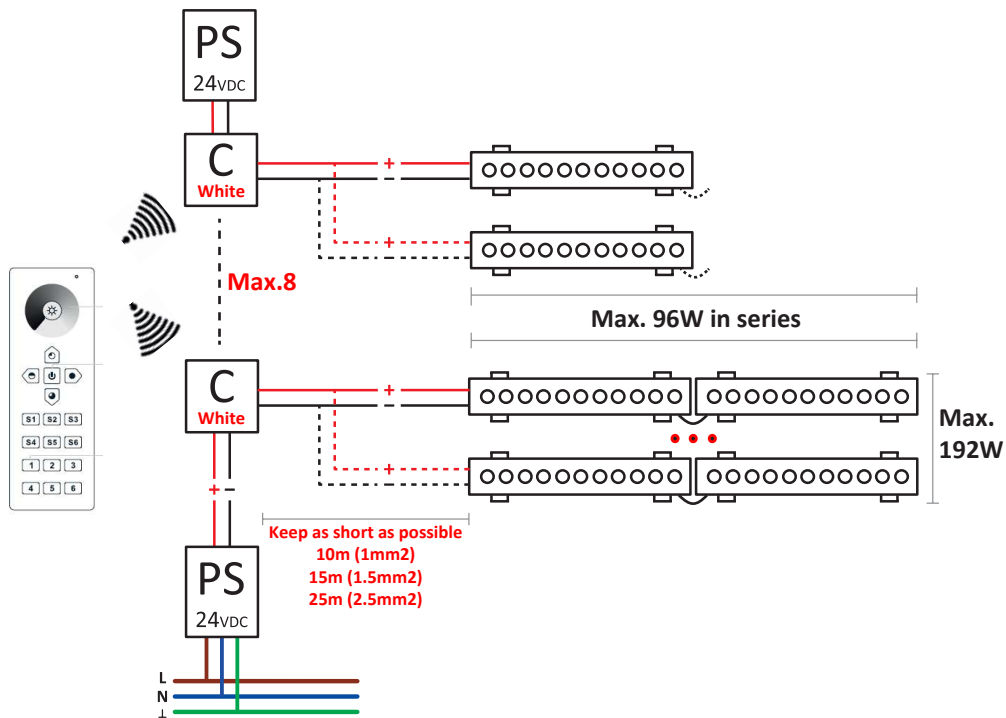

## 1-10V

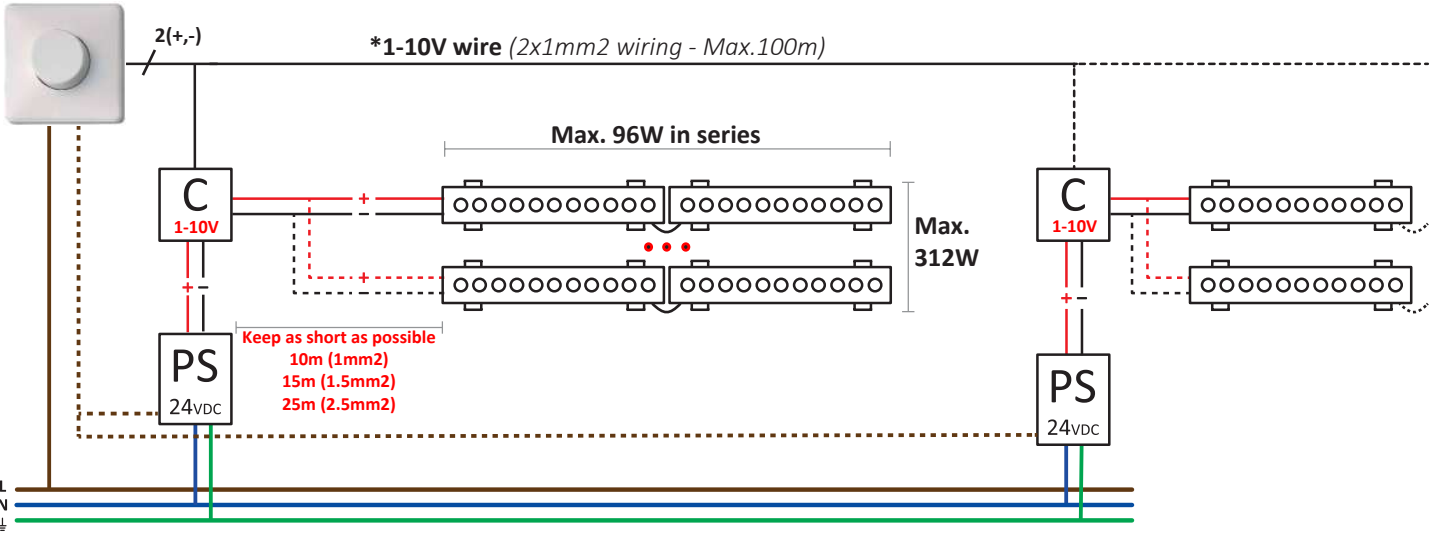


## DALI

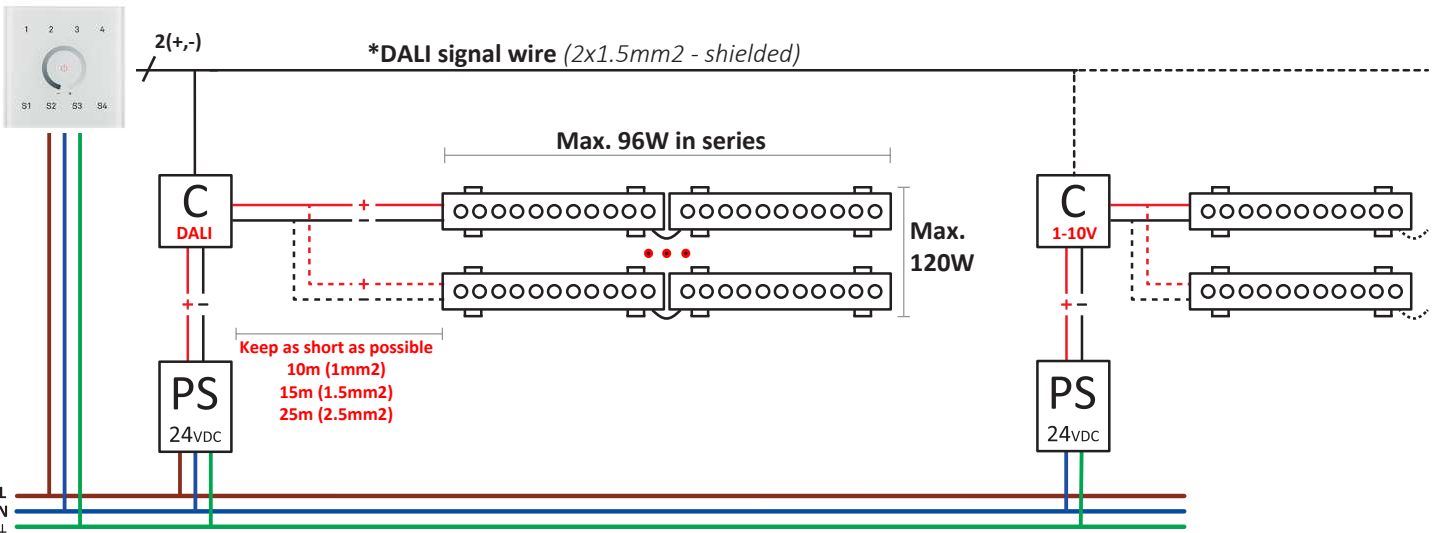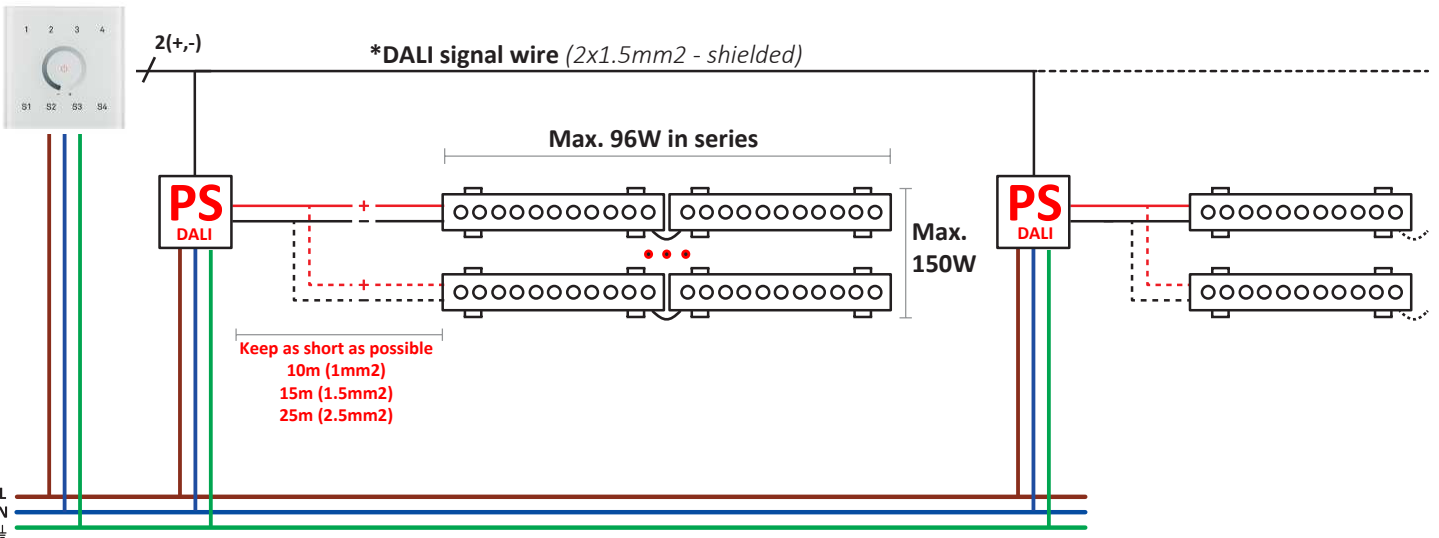


## RGB

### Remote control

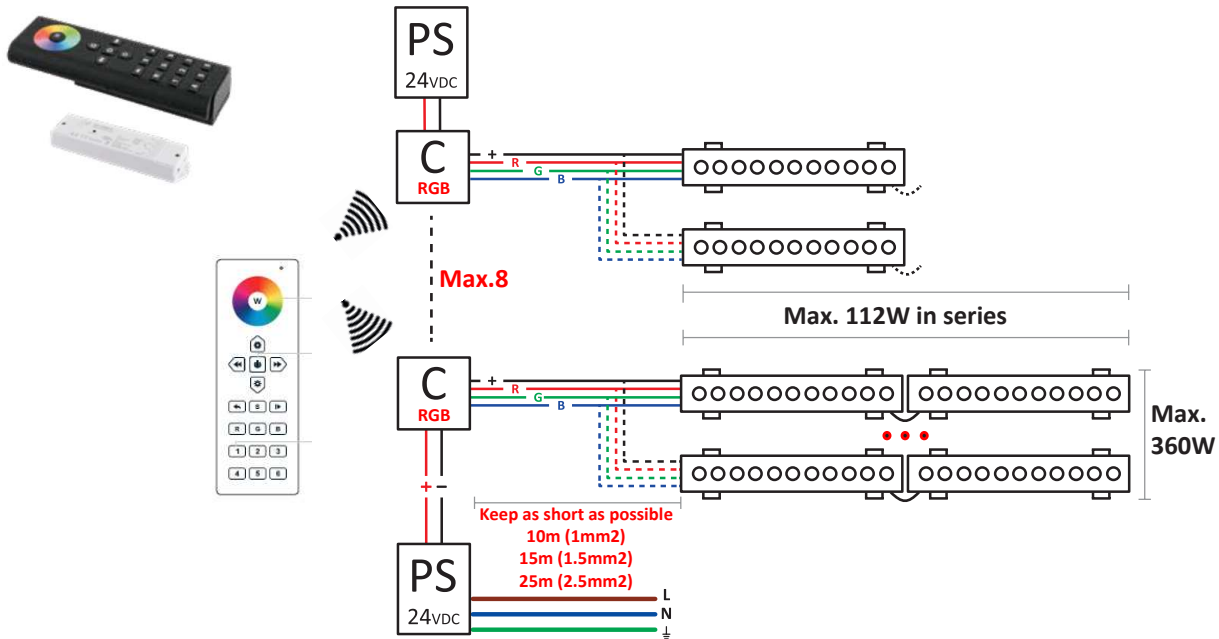

### Wall tactile screen (PWM controller)

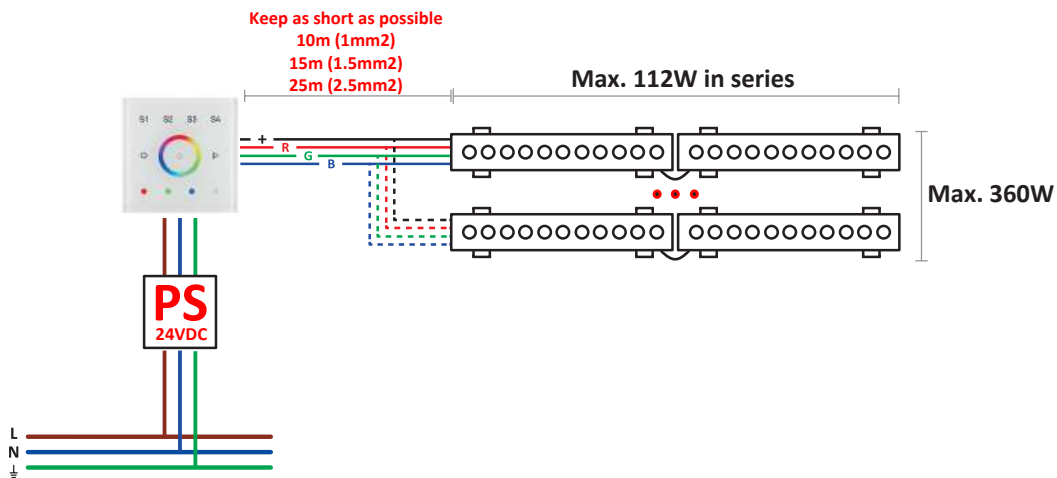

### Wall tactile screen (DMX controller)

