

Tron Wall fixture



Description

Linear lighting



For uplighting.. Suitable for installation in marine environments. Includes 2 cable outlets to facilitate chain mounting. Adjustable light source. Structure material: Extruded aluminium. Structure finish: Anodized. Diffuser material: Glass. Diffuser finish: Transparent. UV protection. Warranty: 5 Years. Ta max: 50°C.

Finish

Anodized
Transparent

Material

Extruded aluminium
Glass



TECHNICAL CHARACTERISTICS

Light source

Light source: LED CREE
Output (W): 24W
Color temperature: Warm White - 3000K
CRI: 80
Real Lumen: 2459
Qty Leds: 14
Lm/Real W: 102
Life Time: 40.000h L90B10
Bin / Grup: 7C1 o 7B4
MacAdam steps: 2
UGR: 15.7
Photobiological risk: RG1

GEAR

This item requires gear. It is not included.



Luminaire

Double cable exit: Yes
Drainage: No
Seaside: Yes
Uv Protection: Yes
Warranty: 5 Years
Ta max: 50°C

Logistics



Energy Efficiency: LED A++
EAN Code: 8435381497705
Net Weight (Kg): 1.150
Weight in Kg (packaged): 1.593
Packing: - x - x -
Masterbox: 12

The photograph may not match the reference exactly. Please read the product description to identify the finish.

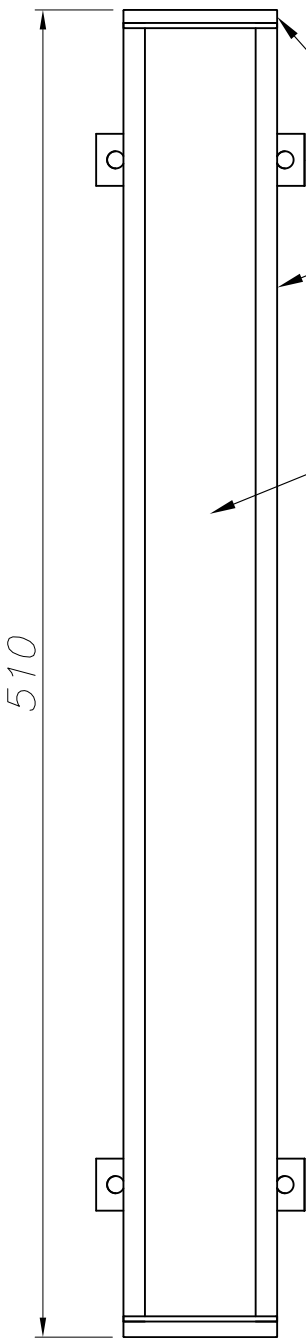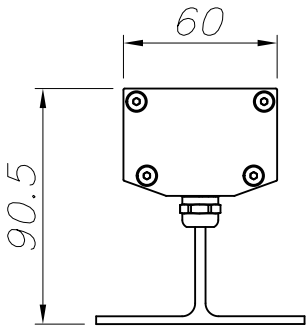

ALUMINIO ANODIZADO
ANODIZED ALUMINIUM

CRISTAL TRANSPARENTE
TRANSPARENT GLASS

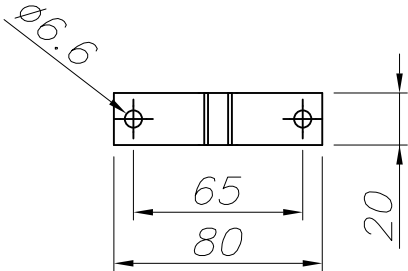

PLANTILLA DE INSTALACION
INSTALLATION TEMPLATE

LEDS C4

GUIA INSTALACIÓN SERIE TRON
INSTALLATION GUIDE TRON SERIES
INSTALLATIONSANLEITUNG SERIE TRON
GUIDE D'INSTALLATION SÉRIE TRON
GUIDA DI INSTALLAZIONE SERIE TRON

05-E001-54-CL / 05-E003-54-CL - WARM WHITE








05-E001-54-CM / 05-E003-54-CM - NEUTRAL WHITE

05-E000-54-37 / 05-E002-54-37 - RGB

LEDS-C4 S.A.
CIF A-59410910

Afores, s/n
25750 Torà · Lleida · Spain
T +34 973 46 81 00
F +34 973 46 81 06
e-mail: leds-c4@leds-c4.com

WWW.LEDS-C4.COM

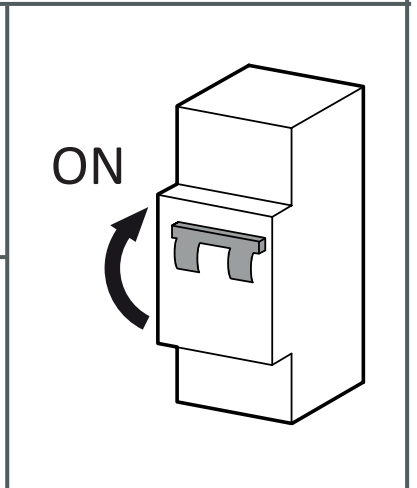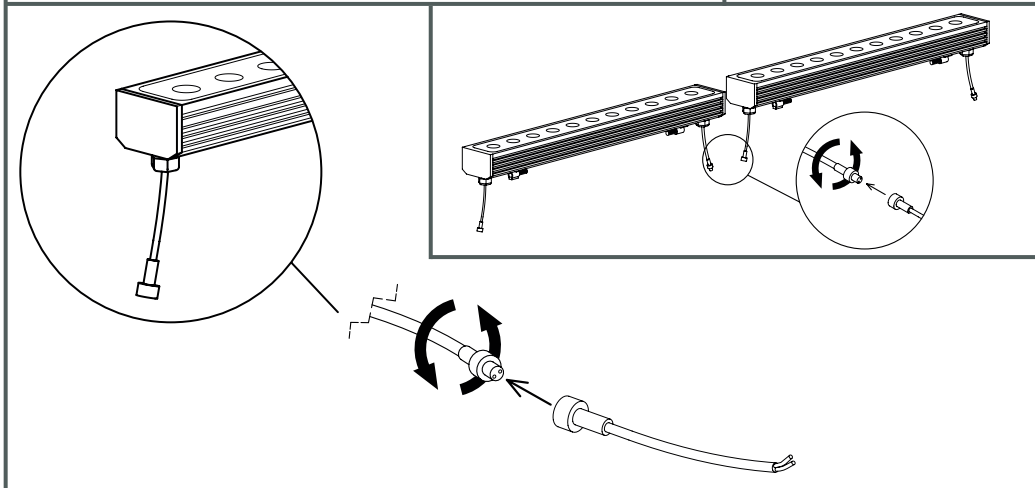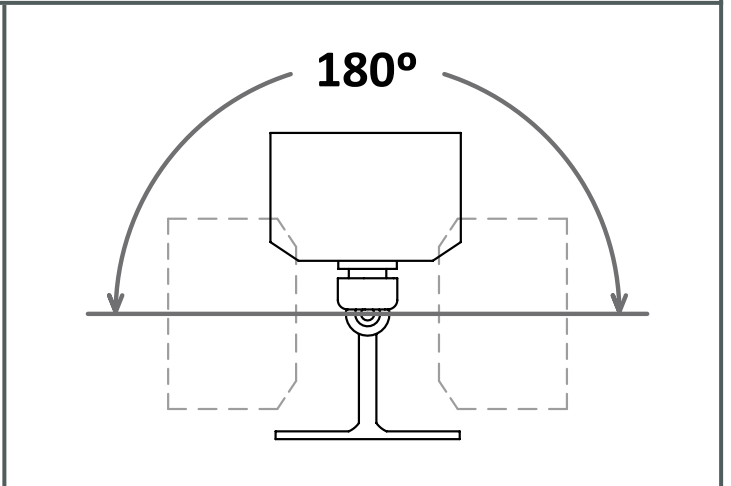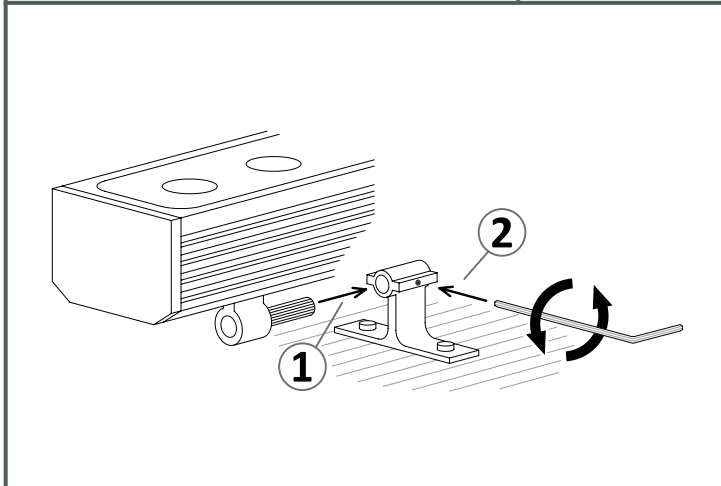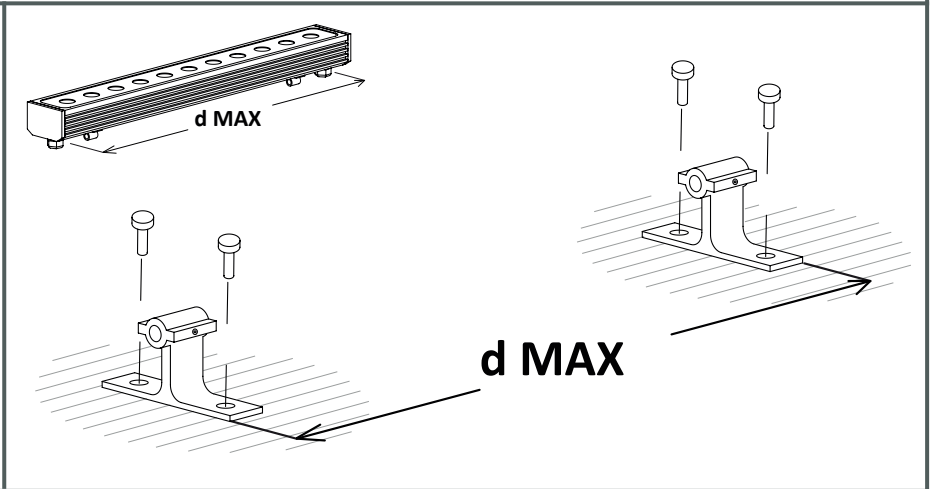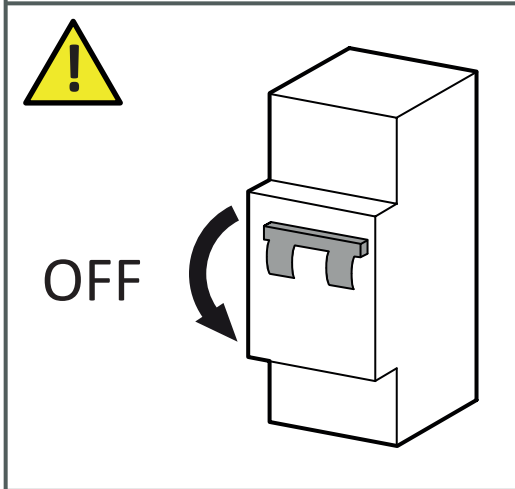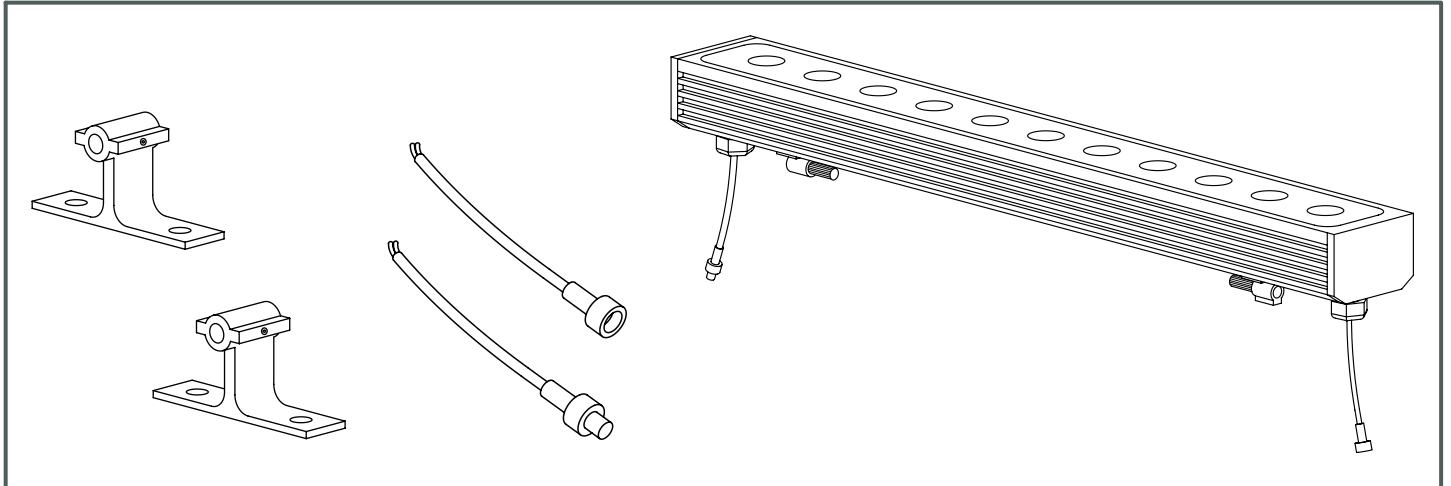

- PS**
24VDC
- Power Supply
 71-6339-00-00 - 35W
 71-6340-00-00 - 60W
 71-6342-00-00 - 75W
 71-6341-00-00 - 100W
 71-6343-00-00 - 150W
 71-6344-00-00 - 150W
 71-6345-00-00 - 240W
 71-6346-00-00 - 320W

- PS**
DALI
- Power Supply DALI
 71-7708-00-00 - 150W

- C**
DALI
- Controller DALI
 71-3473-00-00
 24V/120W

- C**
DMX
- Controller DMX
 71-3493-00-00
 RGB/24V/144W
 RGBW/24V/192W

- C**
1-10V
- Controller 1-10V
 71-0727-00-00
 24V/2x156W


- Tactile screens**
- 71-7666 RGB DMX
 71-7664 RGB PWM
 71-7671 DALI 1 zone
 71-7665 DALI 4 zones

- C**
WHITE
- Remote control White
 71-7670 Remote control
 71-7668 Reciever unit
 24V/192W
 12V/96W


- C**
RGB
- Remote control RGB
 71-7667 Remote control
 71-7669 Reciever unit
 24V/360W
 12V/180W

WHITE


Not dimmable

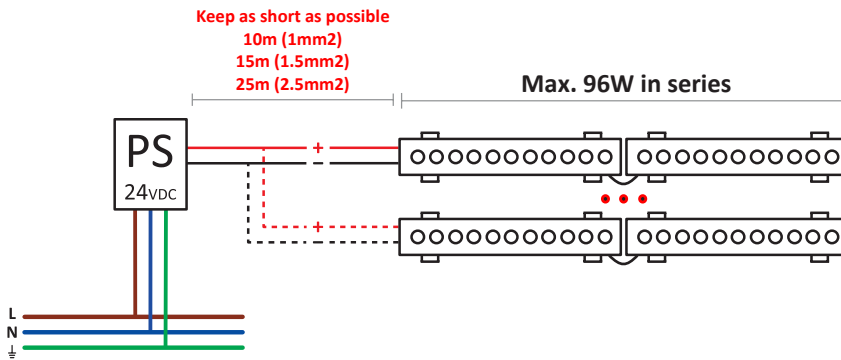



Remote control

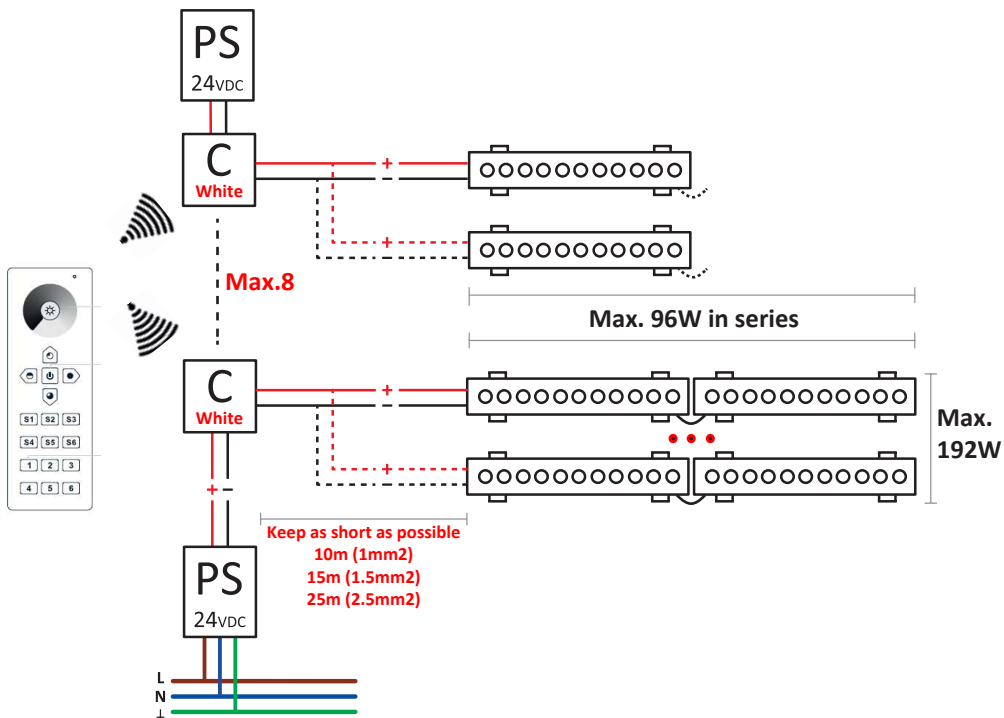

1-10V

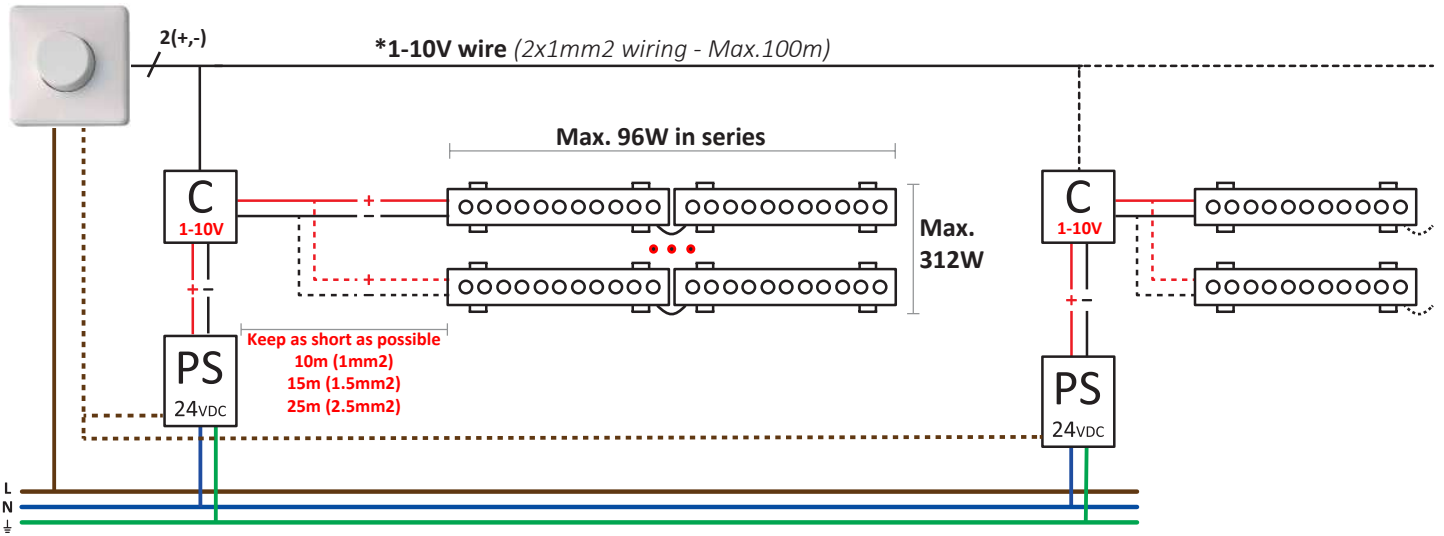


DALI

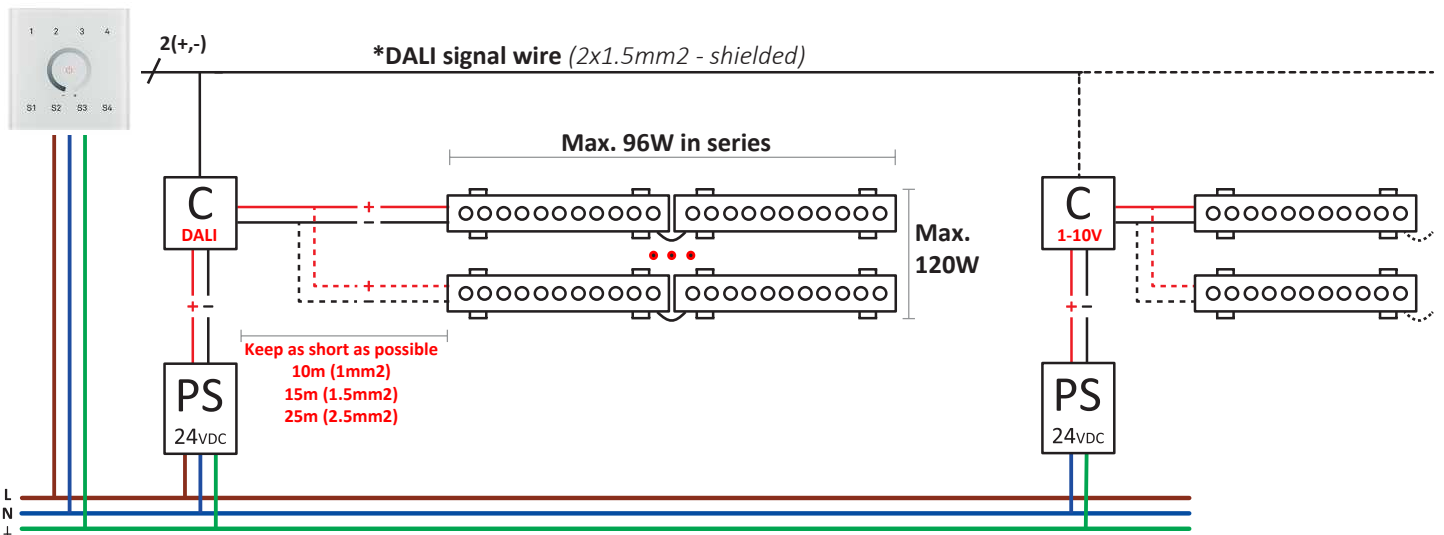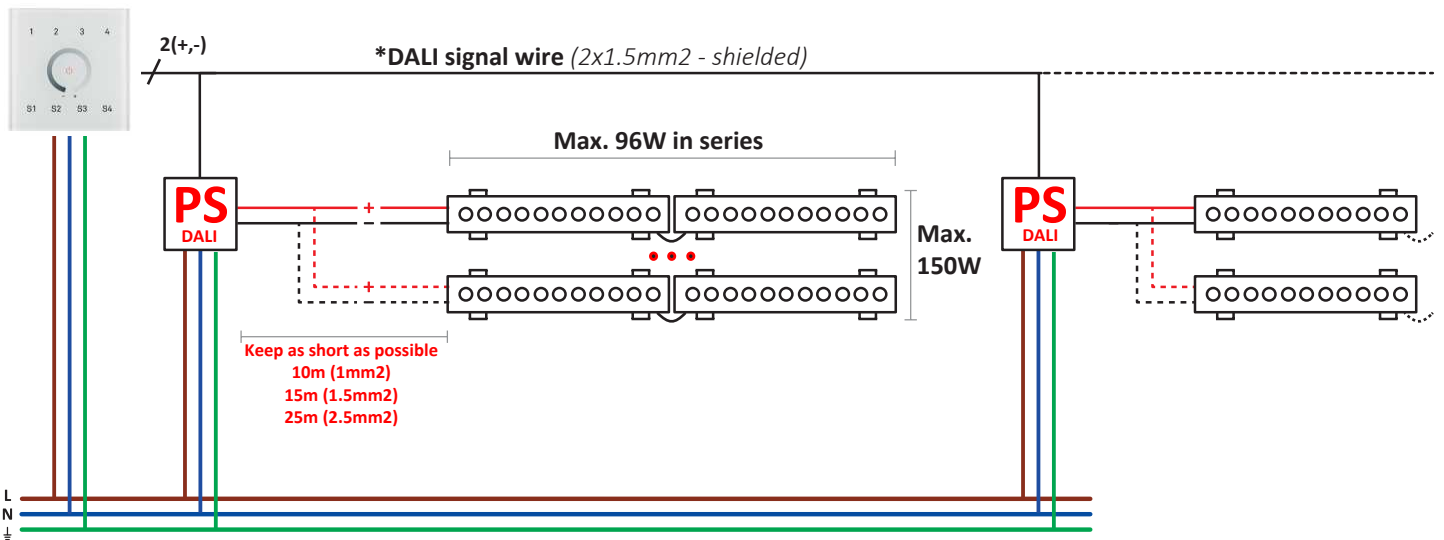


RGB

Remote control

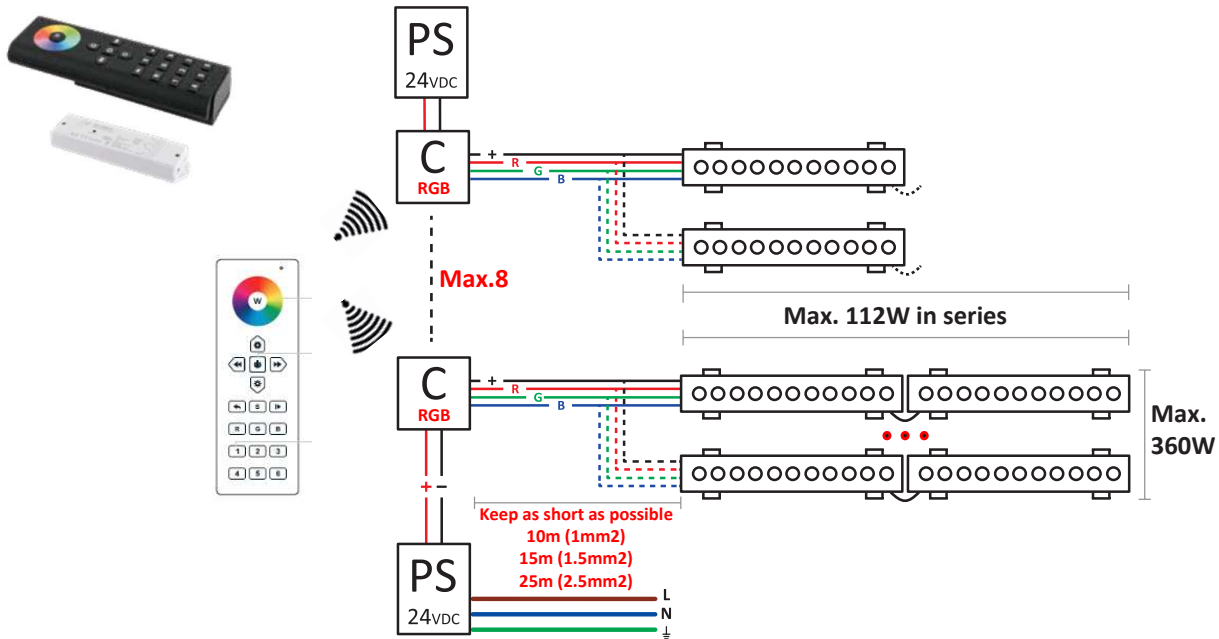

Wall tactile screen (PWM controller)

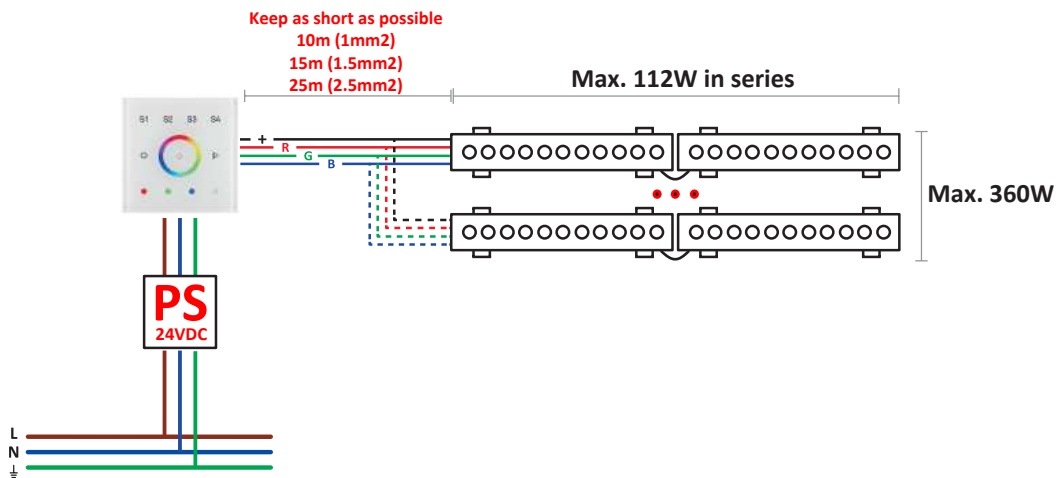

Wall tactile screen (DMX controller)

